

Club Car

ALWAYS DRIVEN



A close-up photograph of the front of a green Club Car utility vehicle. The image focuses on the headlight and fog light assembly. The headlight is on the left, with a clear lens reflecting the surroundings. The fog light is on the right, with an amber-colored lens. The green body of the vehicle is visible, showing a glossy finish. The background is dark and out of focus.

Always Driven.

For 30 years Club Car® has built utility vehicles for the dawn-to-dusk work ethic because maintaining a golf property is no part-time affair. It's all-in or nothing. We're just as serious about building Carryalls. There are a thousand jobs out there. For those driven to get them done, Carryall will always be there.





Redesigning the legendary Carryall is not a job you take on lightly. Or alone. Club Car® traveled the world to gauge what customers wanted. Their vision became our mission. Built on our 30-year legacy of performance and dependability, the all-new Carryall is more more powerful, versatile, efficient and comfortable, more of what makes Carryall the most valued utility vehicle in golf. 1,000 Jobs. Only One Carryall.

The Legend. Reborn.

**Electronic Fuel Injection:**

A muscular, 14 horsepower rated engine that also reduces fuel consumption by up to 50%.

**Rugged Bed Box:**

Rhino® lining protects floor. Ingenious bed box rail system organizes and secures cargo.

**IQ Plus Electric Drive**

System: Across the line upgrades integrate new high-efficiency charging systems, improved amp hour tracking and charge confirmations.

**Auto Styling and**

Ergonomics: Inspired by the pickup you drive to work.

New EFI Engine:

More climb, less dime.





At the heart of the redesigned Carryall hums our new power plant, developed by Subaru and sporting a 14 horsepower rated engine. The overhead cam engine with electronic fuel injection (EFI) delivers a 30% power boost and still reduces fuel consumption by up to 50%.

Save on more than just fuel costs.

- Build quality, including case-hardened steel timing chain, lowers maintenance costs
- Runs cooler, quieter, with lower emissions
- Weathers all conditions; starts fast even on the coldest mornings
- Automatically adjusts for higher altitudes
- No carburetor or choke to master or maintain
- No oil filter to change; splash lubrication reduces maintenance
- Backed by the industry's best warranty

Every Carryall is dressed for golf.



Heavy-Duty Brush Guard:

Protection for those trips off the beaten path.



Durable Bed Box: Rust-proof, aircraft-grade aluminum with Rhino®-lined floor.



Green Cowl: The standard color designating golf utility vehicles.



Does any crew work like golf crews work? Not likely. Up before dawn, at it until nightfall chases you off the course, with a 1,000 different jobs in between. That's why we equip Carryalls for the unique demands of the golf operation. Your new vehicles arrive equipped and ready for the chores you encounter every day. From brush guard to trailer hitch, work with the best-dressed vehicles in golf.



Differential Guard: Protects the differential from damage in rugged terrain.



Turf-Friendly Tires: Bigger for more ground clearance, gentler on the turf.



Heavy-Duty Trailer Hitch: Built to handle heavy loads.

CARRYALL 500 TURF



Carryall 500 Turf: Call in the muscle.

With 60% more bed capacity and 67% more towing capacity than the 550, Carryall 500 Turf is our flagship utility vehicle and the undisputed strong man in the 5-series. This economical yeoman is designed to take on big loads and demanding conditions to cut your biggest chores down to size.

Make molehills out of mountains of work.



Carryall 550 Turf: The go-where-you-need-it utility vehicle.

With larger tires and higher ground clearance, Carryall 550 Turf can get in and out of places other vehicles avoid. And with its ample 500-lb. bed capacity, the 550 is the smart choice for medium-duty chores anywhere on the course where the terrain is challenging.



CARRYALL 550 TURF

CARRYALL 700
TURF

Fit-to-task and fiscally fit



Built for the long haul.

Now available with the newly enhanced IQ Plus electric drive system and the all-new EFI gas engine, it's all about return on investment and nothing carries that responsibility like the Carryall 700 Turf. With 1,500 pounds of capacity and almost 6-feet of cargo bed, the 700 lives to handle your operation's most demanding jobs, all day long.

Versatility in a nimble package.

Carryall 300 Turf is a multi-tasking dynamo that can handle just about any light duty chore thrown its way. With either the new Subaru gas engine or our all-new electric system anchored by our new connected charger, E.R.I.C., driving its 800-pound capacity, the 300 is a sun-up-to-sundown laborer and hill-climbing whiz.



E.R.I.C.
EFFICIENT RELIABLE INTELLIGENT CONNECTED

The Carryall 300 Turf is the only utility vehicle equipped with E.R.I.C., Club's Car's all-new, advanced charging system. Efficient. Reliable. Intelligent. Connected. E.R.I.C. does it all. With cutting-edge features built into a smaller, lighter and infinitely smarter design, E.R.I.C. will have an immediate impact on your operation.



CARRYALL 300

TURF

Makes its mark by
not leaving any.



Carryall 1500 2-WD—heavy-duty capabilities that treads lightly on turf and improved surfaces. Two-wheel drive features include:

- Rear-wheel drive
- 23" front / 24" rear turf tires
- Handles up to 1050 lb. of payload or 1500 lb. with high-capacity option
- 19 mph maximum speed



Carryall 1500 4-WD

When the job calls for more pull, Carryall 1500 4-WD answers the call.

- IntelliTrak® senses the terrain, delivers power to the front wheels when needed
- 25" all-terrain tires and 12.1" clearance handle demanding and tough conditions
- 4-wheel hydraulic disc brakes
- 25 mph maximum speed
- Roll Over Protective Structure (ROPS) certified to meet five different international standards



Versatility
right on track.




Club Car®'s all new bed box rail system expands your bed's payload while securing whatever's on board. Sturdy channels engineered into the walls of the cargo box accept a variety of attachments—cleats, hooks and clamps—for storing, tying down and protecting tools and gear in transit.



Bed dividers help segregate and secure any size load.



Add/remove/relocate clamps and tie downs to fit your cargo.

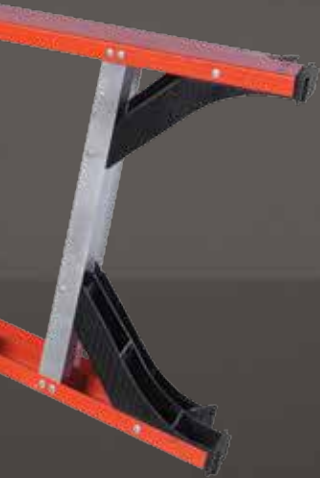

Reinforced aluminum channels can handle almost any load.



A variety of equipment—cleats, hooks, clamps—are available to fit the tool and cargo.



Secure expensive power tools, protecting them from transit damage.




Attachment clamps are injection molded for solid fit and dependable performance.

ACCESSORIES

Equip your vehicles for maximum performance and comfort.

Every standard Carryall is ready to outwork, outperform and outlast everything else in its class. But when you want to tailor your vehicles to perform specialized tasks or adapt to the unique needs of your operation, Club Car® has the accessories and options to build out your Carryalls to perfection. Every accessory is designed and built specifically to work with Club Car vehicles.

4 x 2 accessories



Canopy Top



Heavy Duty
Brush Guard



Stake-Side Kit



Receiver Hitch



Driving Range
Protective Enclosure



Electric Bed Lift



ROPS Cab (Roll Over
Protective Structure)



Cab Safety
Strobe Light



Cab Outside Mirrors



LED Headlights



Accessory Switch
Panel



Differential Guard



Hour Meter




Fuel Gauge/Hour
Meter




Heavy Duty Batteries



Battery Capacity
Indicator



Extra-Traction
Turf Tires



Premium Tread
6-Ply Tires



Swisher® Dump Cart

PHOTOS UNAVAILABLE:

- Universal Ball Picker Mount
- Flatbed Tool Box
- Van Box
- Cargo Box Tool Box
- All-Terrain Tires
- Mud Tires

4 x 4 accessories



Lighting Package
(horn, turn signals, brake
lights)



Plastic Canopy Top



Custom Van Box



Rear Cargo Cage



Electric Bed Lift




Underhood Storage
(Gas Only)



Stake-Side Kit



2-Inch Front
Receiver Hitch



Cargo Bed Toolbox



2,500 lb. Warn
Winch



Pintle Hitch



Nerf Bars



54- or 62-Inch
Plow Blade



Swisher® Trailmower



Swisher® Dump Cart



40-Gallon Sprayer



Cab Heater
(Gas Only)

Not all accessories are available in all markets. Contact an authorized Club Car dealer for more information.

SPECIFICATIONS



CARRYALL 300 TURF



CARRYALL 500 TURF

	CARRYALL 300 TURF		CARRYALL 500 TURF	
POWER SOURCE	ELECTRIC	GASOLINE	ELECTRIC	GASOLINE
ENGINE/MOTOR TYPE	48-volt DC	Subaru, 4-cycle	48-volt DC	Subaru, 4-cycle
CONTROLLER	500 Amp - Solid State	NA	500 Amp - Solid State	NA
DISPLACEMENT	NA	404 cc	NA	404 cc
CYLINDERS	NA	Single	NA	Single
VALVING	NA	Overhead Cam	NA	Overhead Cam
COOLING	NA	Air Cooled	NA	Air Cooled
HORSEPOWER (RATED)	3.3 hp (2.4 kW) rated, Peak 13 hp (9.6 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940	3.7 hp (2.7kW) rated, Peak 20 hp (14.9 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940
MAX TORQUE	34.5 ft-lb (46.7 N-m) rated @ 1980 rpm	19.91 ft lb (27.0 N-m) rated @ 2400 RPM	71 ft-lb (96.2 N-m) rated @ 1450 RPM	19.91 ft lb (27.0 N-m) rated @ 2400 RPM
LUBRICATION	NA	Splash lubrication	NA	Splash lubrication
GOVERNOR	NA	Ground Speed	NA	Ground Speed
TRANSMISSION	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)
FRONT/REAR DIFFERENTIAL	NA	NA	NA	NA
GEAR SELECTION	Forward/Neutral/Reverse	Forward/Neutral/Reverse	Forward/Neutral/Reverse	Forward/Neutral/Reverse
GEAR RATIO	12.32:1	11.47:1 forward; 15.63:1 reverse	12.32:1	11.47:1 forward; 15.63:1 reverse
IGNITION	NA	Electronic	NA	Electronic
BATTERY	Six 8-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve	Eight 6-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve
CHARGER	ERIC (650 W High Frequency)	NA	DeltaQ QuiQ (1 kW High Frequency)	NA
HEADLIGHTS	Two 37.5 Watt Halogen	Two 37.5 Watt Halogen	Two 37.5 Watt Halogen	Two 37.5 Watt Halogen
FUEL DELIVERY SYSTEM	NA	Electronic Fuel Injection (EFI)	NA	Electronic Fuel Injection (EFI)
FUEL CAPACITY	NA	4.6 gal (17.4 L)	NA	4.6 gal (17.4 L)
STEERING MECHANISM	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion
SUSPENSION (FRONT)	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
SUSPENSION (REAR)	Semi-independent leaf spring with dual hydraulic shocks	Semi-independent leaf spring with dual hydraulic shocks	Semi-independent leaf spring with dual hydraulic shocks	Semi-independent leaf spring with dual hydraulic shocks
BRAKES	Rear Mechanical Drum	Rear Mechanical Drum	4-wheel Mechanical Drum	4-wheel Mechanical Drum
PARK BRAKE	Foot Operated, Multi-lock	Foot Operated, Multi-lock	Foot Operated, Multi-lock	Foot Operated, Multi-lock
BODY (FRONT & FINISH)	ArmorFlex with automotive paint/ clearcoat	ArmorFlex with automotive paint/ clearcoat	ArmorFlex with automotive paint/ clearcoat	ArmorFlex with automotive paint/ clearcoat
BODY (FRAME AND REAR)	Aluminum	Aluminum	Aluminum	Aluminum
TIRES (FRONT)	20 x 10-10, 6-ply	20 x 10-10, 6-ply	20 x 10-10, 6-ply	20 x 10-10, 6-ply
TIRES (REAR)	20 x 10-10, 6-ply	20 x 10-10, 6-ply	20 x 10-10, 6-ply	20 x 10-10, 6-ply
WHEELBASE	65.5 in (166.3 cm)	65.5 in (166.3 cm)	78.1 in (198.3 cm)	78.1 in (198.3 cm)
OVERALL HEIGHT	47.1 in (119.6 cm)	47.1 in (119.6 cm)	47.1 in (119.6 cm)	47.1 in (119.6 cm)
OVERALL LENGTH	110.1 in (279.6 cm)	110.1 in (279.6 cm)	118 in (299.7cm)	118 in (299.7cm)
BED L X W X H (CARGO BOX)	36.2 x 47.5 x 10.5 in (91.9 x 120.6 x 26.6 cm)	36.2 x 47.5 x 10.5 in (91.9 x 120.6 x 26.6 cm)	44.2 x 47.5 x 10.5 in (112.2 x 120.6 x 26.6 cm)	44.2 x 47.5 x 10.5 in (112.2 x 120.6 x 26.6 cm)
DIFFERENTIAL GROUND CLEARANCE	5.6 in (14.2 cm)	5.2 in (13.2 cm)	5.6 in (14.2 cm)	5.2 in (13.2 cm)
TRACK WIDTH (FRONT)	36.6 in (92.9 cm)	36.6 in (92.9 cm)	36.6 in (92.9 cm)	36.6 in (92.9 cm)
TRACK WIDTH (REAR)	39.5 in (100.3 cm)	39.5 in (100.3 cm)	39.5 in (100.3 cm)	39.5 in (100.3 cm)
MAX WIDTH (W/O MIRRORS)	50.3 in (127.7cm)	50.3 in (127.7cm)	50.3 in (127.7cm)	50.3 in (127.7cm)
CURB WEIGHT (W/ BATTERIES)	1105 lb (501.2 kg)	817 lb (370. 5 kg)	1393 lb (631.8 kg)	907 lb (411.4 kg)
TOTAL VEHICLE CAPACITY	800 lb (362.8 kg)	800 lb (362.8 kg)	1200 lb (544.3 kg)	1200 lb (544.3 kg)
BED LOAD CAPACITY	300 lb (136.0 kg)	300 lb (136.0 kg)	800 lb (362.8 kg)	800 lb (362.8 kg)
TOWING CAPACITY	800 lb (362.8 kg)	800 lb (362.8 kg)	1200 lb (544.3 kg)	1200 lb (544.3 kg)
COMBINED GROSS VEHICLE CAPACITY	800 lb (362.8 kg)	800 lb (362.8 kg)	1500 lb (680.3 kg)	1500 lb (680.3 kg)
SPEED	15-17 mph (24-27 kph)	15-17 mph (24-27 kph)	15-17 mph (24-27 kph)	15-17 mph (24-27 kph)
WARRANTY	4 yr limited battery warranty; 3 yr limited powertrain/frame; 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/ frame; 2 yr limited remaining vehicle	4 yr limited battery warranty; 3 yr limited powertrain/frame; 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/ frame; 2 yr limited remaining vehicle



CARRYALL 550 TURF



CARRYALL 700 TURF

	CARRYALL 550 TURF		CARRYALL 700 TURF	
POWER SOURCE	ELECTRIC	GASOLINE	ELECTRIC	GASOLINE
ENGINE/MOTOR TYPE	48-volt DC	Subaru, 4-cycle	48-volt DC	Subaru, 4-cycle
CONTROLLER	500 Amp - Solid State	NA	500 Amp - Solid State	NA
DISPLACEMENT	NA	404 cc	NA	404 cc
CYLINDERS	NA	Single	NA	Single
VALVING	NA	Overhead Cam	NA	Overhead Cam
COOLING	NA	Air Cooled	NA	Air Cooled
HORSEPOWER (RATED)	3.7 hp (2.7kW) rated, Peak 20 hp (14.9 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940	3.7 hp (2.7kW) rated, Peak 20 hp (14.9 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940
MAX TORQUE	71 ft-lb (96.2 N-m) rated @ 1450 RPM	19.91 ft lb (27.0 N-m) rated @ 2400 RPM	71 ft-lb (96.2 N-m) rated @ 1450 RPM	19.91 ft lb (27.0 N-m) rated @ 2400 RPM
LUBRICATION	NA	Splash lubrication	NA	Splash lubrication
GOVERNOR	NA	Ground Speed	NA	Ground Speed
TRANSMISSION	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)
FRONT/REAR DIFFERENTIAL	NA	NA	NA	NA
GEAR SELECTION	Forward/Neutral/Reverse	Forward/Neutral/Reverse	Forward/Neutral/Reverse	Forward/Neutral/Reverse
GEAR RATIO	12.32:1	11.47:1 forward; 15.63:1 reverse	12.32:1	11.47:1 forward; 15.63:1 reverse
IGNITION	NA	Electronic	NA	Electronic
BATTERY	Eight 6-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve	Eight 6-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve
CHARGER	DeltaQ QuiQ (1 kW High Frequency)	NA	DeltaQ QuiQ (1 kW High Frequency)	NA
HEADLIGHTS	Two 37.5 Watt Halogen	Two 37.5 Watt Halogen	Two 37.5 Watt Halogen	Two 37.5 Watt Halogen
FUEL DELIVERY SYSTEM	NA	Electronic Fuel Injection (EFI)	NA	Electronic Fuel Injection (EFI)
FUEL CAPACITY	NA	4.6 gal (17.4 L)	NA	4.6 gal (17.4 L)
STEERING MECHANISM	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion
SUSPENSION (FRONT)	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
SUSPENSION (REAR)	Semi-independent leaf spring with dual hydraulic shocks	Semi-independent leaf spring with dual hydraulic shocks	Semi-independent leaf spring with dual hydraulic shocks	Semi-independent leaf spring with dual hydraulic shocks
BRAKES	4-wheel Mechanical Drum	4-wheel Mechanical Drum	4-wheel Mechanical Drum	4-wheel Mechanical Drum
PARK BRAKE	Foot Operated, Multi-lock	Foot Operated, Multi-lock	Foot Operated, Multi-lock	Foot Operated, Multi-lock
BODY (FRONT & FINISH)	ArmorFlex with automotive paint/ clearcoat	ArmorFlex with automotive paint/ clearcoat	ArmorFlex with automotive paint/ clearcoat	ArmorFlex with automotive paint/ clearcoat
BODY (FRAME AND REAR)	Aluminum	Aluminum	Aluminum	Aluminum
TIRES (FRONT)	22 x 10-10, 4-ply Turf tread; 22 x 10- 10, 6-ply heavy-duty all-terrain	22 x 10-10, 4-ply Turf tread; 22 x 10- 10, 6-ply heavy-duty all-terrain	20 x 10-10, 6-ply	20 x 10-10, 6-ply
TIRES (REAR)	22 x 10-10, 4-ply Turf tread; 22 x 10- 10, 6-ply heavy-duty all-terrain	22 x 10-10, 4-ply Turf tread; 22 x 10- 10, 6-ply heavy-duty all-terrain	20 x 10-10, 6-ply	20 x 10-10, 6-ply
WHEELBASE	78.1 in (198.3 cm)	78.1 in (198.3 cm)	99.1 in (251.7 cm)	99.1 in (251.7 cm)
OVERALL HEIGHT	51.2 in (130.0 cm)	51.2 in (130.0 cm)	47.1 in (119.6 cm)	47.1 in (119.6 cm)
OVERALL LENGTH	118 in (299.7cm)	118 in (299.7cm)	137.5 in (349.3 cm)	137.5 in (349.3 cm)
BED L X W X H (CARGO BOX)	44.2 x 47.5 x 10.5 in (112.2 x 120.6 x 26.6 cm)	44.2 x 47.5 x 10.5 in (112.2 x 120.6 x 26.6 cm)	65.5 x 47.5 x 10.5 in (166.3 x 120.6 x 26.6cm)	65.5 x 47.5 x 10.5 in (166.3 x 120.6 x 26.6cm)
DIFFERENTIAL GROUND CLEARANCE	6 in (15.2 cm)	6 in (15.2 cm)	5.6 in (14.2 cm)	5.2 in (13.2 cm)
TRACK WIDTH (FRONT)	36.6 in (92.9 cm)	36.6 in (92.9 cm)	36.6 in (92.9 cm)	36.6 in (92.9 cm)
TRACK WIDTH (REAR)	39.5 in (100.3 cm)	39.5 in (100.3 cm)	39.5 in (100.3 cm)	39.5 in (100.3 cm)
MAX WIDTH (W/O MIRRORS)	50.3 in (127.7cm)	50.3 in (127.7cm)	50.3 in (127.7cm)	50.3 in (127.7cm)
CURB WEIGHT (W/ BATTERIES)	1402 lb (635.9 kg)	942 (427.2 kg)	1475 lb (669 kg)	993 lb (450.4 kg)
TOTAL VEHICLE CAPACITY	900 lb (408.2 kg)	900 lb (408.2 kg)	1500 lb (680.3 kg)	1500 lb (680.3 kg)
BED LOAD CAPACITY	500 lb (226.7 kg)	500 lb (226.7 kg)	1000 lb (453.5 kg)	1000 lb (453.5 kg)
TOWING CAPACITY	900 lb (408.2 kg)	900 lb (408.2 kg)	1500 lb (680.3 kg)	1500 lb (680.3 kg)
COMBINED GROSS VEHICLE CAPACITY	900 lb (408.2 kg)	900 lb (408.2 kg)	1500 lb (680.3 kg)	1500 lb (680.3 kg)
SPEED	15-17 mph (24-27 kph)	15-17 mph (24-27 kph)	15-17 mph (24-27 kph)	15-17 mph (24-27 kph)
WARRANTY	4 yr limited battery warranty; 3 yr limited powertrain/frame; 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/ frame; 2 yr limited remaining vehicle	4 yr limited battery warranty; 3 yr limited powertrain/frame; 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/ frame; 2 yr limited remaining vehicle



CARRYALL 1500 4x2



CARRYALL 1500 4x4

POWER SOURCE	GASOLINE	GASOLINE	DIESEL
ENGINE	Kawasaki 4-cycle, industrial grade	Kawasaki 4-cycle, industrial grade	Kubota D722, industrial grade
CONTROLLER	NA	NA	NA
DISPLACEMENT	675 cc	675 cc	719 cc
CYLINDERS	Twin-cylinder	Twin-cylinder	3-cylinder
VALVING	OHV	OHV	OHV
COOLING	Air Cooled	Air Cooled	Liquid-cooled
HORSEPOWER (RATED)	20.1 hp (15.0 kW) rated @ 3400 RPM per SAE J1349	20.1 hp (15.0 kW) rated @ 3400 RPM per SAE J1349	20.0 hp (15.0 kW) rated @ 3600 RPM per SAE J1995
MAX TORQUE	36.5 ft/lb (49.5 Nm)	36.5 ft/lb (49.5 Nm)	33 ft/lb (45 Nm)
LUBRICATION	Full-pressure, spin-on oil filter	Full-pressure, spin-on oil filter	Full-pressure, spin-on oil filter
GOVERNOR	Automatic ground speed sensing	Automatic ground speed sensing	Automatic ground speed sensing
TRANSMISSION	Wide ratio CVT; 3.7:1 low, 0.59:1 high	Wide ratio CVT; 3.7:1 low, 0.59:1 high	Wide ratio CVT; 3.7:1 low, 0.59:1 high
FRONT/REAR DIFFERENTIAL	Automatic locking rear differential	IntelliTrak™ Automatic 4-wheel Drive	IntelliTrak™ Automatic 4-wheel Drive
GEAR SELECTION	Forward/Neutral/Reverse	Forward/Neutral/Reverse	Forward/Neutral/Reverse
GEAR RATIO	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential
IGNITION	Transistorized magneto	Transistorized magneto	Compression
BATTERY	12-volt 500 CCA 105 min Reserve	12-volt 500 CCA 105 min Reserve	12-volt 500 CCA 105 min Reserve
CHARGER	NA	NA	NA
HEADLIGHTS	Headlights standard	Headlights standard	Headlights standard
FUEL DELIVERY SYSTEM	Carburetor	Carburetor	Mechanical injection
FUEL CAPACITY	6.5 gal (24.6 L)	6.5 gal (24.6 L)	6.5 gal (24.6 L)
STEERING MECHANISM	Rack and pinion with Tilt Steering	Rack and pinion with Tilt Steering	Self-adjusting Rack and Pinion
SUSPENSION (FRONT)	Independent double A-arms with coil-over shocks	Independent double A-arms with coil-over shocks	Independent leaf spring with dual hydraulic shocks
SUSPENSION (REAR)	Semi-independent 4-link solid axle	Semi-independent 4-link solid axle	Independent leaf spring with dual hydraulic shocks
BRAKES	4-wheel, hydraulic disc	4-wheel, hydraulic disc	4-wheel, hydraulic disc
PARK BRAKE	Automotive style	Automotive style	Automotive style
BODY (FRONT & FINISH)	GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish	GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish	GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish
BODY (FRAME AND REAR)	Tubular aluminum	Tubular aluminum	Tubular aluminum
TIRES (FRONT)	4-ply Turf; 23 x 10.5 x 12	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply
TIRES (REAR)	4-ply Turf; 24 x 10.5 .x 12	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply
WHEELBASE	88.7 in (225.3 cm)	88.7 in (225.3 cm)	88.7 in (225.3 cm)
OVERALL HEIGHT	52.6 in (133.5 cm)	78.6 in (199.6 cm)	78.6 in (199.6 cm)
OVERALL LENGTH	124.6 in (316.5 cm)	124.6 in (316.5 cm)	124.6 in (316.5 cm)
BED L X W X H (CARGO BOX)	48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)
DIFFERENTIAL GROUND CLEARANCE	7.3 in (18.5 cm)	8.2 in (20.8 cm)	8.2 in (20.8 cm)
TRACK WIDTH (FRONT)	48.8 in. (124 cm)	48.8 in. (124 cm)	48.8 in. (124 cm)
TRACK WIDTH (REAR)	48.8 in. (124 cm)	48.8 in. (124 cm)	48.8 in. (124 cm)
MAX WIDTH (W/O MIRRORS)	58.5 in. (148.5 cm)	58.5 in. (148.5 cm)	58.5 in. (148.5 cm)
CURB WEIGHT (NO BATTERIES)	1410 lb (639.57 kg)	1430 lbs (648.6 kg)	1550 lbs (703.1 kg)
TOTAL VEHICLE CAPACITY	1450 lb (658 kg)/1900 lb (862 kg)*	1200 lb (544 kg)/1450 lb (658 kg)**	1200 lb (544 kg)/1450 lb (658 kg)**
BED LOAD CAPACITY	1050 lb (476.3 kg)/1500 lb (680.3 kg)*	800 lb (363.2 kg)/1050 lb (658 kg)**	800 lb (363.2 kg)/1050 lb (658 kg)**
TOWING CAPACITY	1450 lb (658 kg)/1900 lb (862 kg)*	1200 lb (544 kg)/1450 lb (658 kg)**	1200 lb (544 kg)/1450 lb (658 kg)**
COMBINED VEHICLE CAPACITY	1450 lb (658 kg)/1900 lb (862 kg)*	1200 lb (544 kg)/1450 lb (658 kg)**	1200 lb (544 kg)/1450 lb (658 kg)**
SPEED	19 mph (30.6 km/h)	25 mph (40.2 km/h)	25 mph (40.2 km/h)
TURNING RADIUS	13 ft (3.8 m)	13 ft (3.8 m)	13 ft (3.8 m)
WARRANTY	2-year/2,000 hour limited	2-year/2,000 hour limited	2-year/2,000 hour limited

*3/4-ton option; ** High-capacity option

SPECIFICATIONS



CARRYALL 1500 4x4 INTELLITACH



CARRYALL 1500SE 4x4

POWER SOURCE	GASOLINE	GASOLINE	DIESEL
ENGINE	Kubota D722, industrial grade	Kawasaki 4-cycle, industrial grade	Kubota D722, industrial grade
CONTROLLER	NA	NA	NA
DISPLACEMENT	719 cc	675 cc	719 cc
CYLINDERS	3-cylinder	Twin-cylinder	3-cylinder
VALVING	OHV	OHV	OHV
COOLING	Liquid-cooled	Air Cooled	Liquid-cooled
HORSEPOWER (RATED)	20.0 hp (15.0 kW) rated @ 3600 RPM per SAE J1995	20.1 hp (15.0 kW) rated @ 3400 RPM per SAE J1349	20.0 hp (15.0 kW) rated @ 3600 RPM per SAE J1995
MAX TORQUE	33 ft/lb (45 Nm)	36.5 ft/lb (49.5 Nm)	33 ft/lb (45 Nm)
LUBRICATION	Full-pressure, spin-on oil filter	Full-pressure, spin-on oil filter	Full-pressure, spin-on oil filter
GOVERNOR	Automatic ground speed sensing	Automatic ground speed sensing	Automatic ground speed sensing
TRANSMISSION	Wide ratio CVT; 3.7:1 low, 0.59:1 high	Wide ratio CVT; 3.7:1 low, 0.59:1 high	Wide ratio CVT; 3.7:1 low, 0.59:1 high
FRONT/REAR DIFFERENTIAL	IntelliTrak™ Automatic 4-wheel Drive	IntelliTrak™ Automatic 4-wheel Drive	IntelliTrak™ Automatic 4-wheel Drive
GEAR SELECTION	Forward/Neutral/Reverse	Forward/Neutral/Reverse	Forward/Neutral/Reverse
GEAR RATIO	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential
IGNITION	Compression	Transistorized magneto	Compression
BATTERY	12-volt 500 CCA 105 min Reserve	12-volt 500 CCA 105 min Reserve	12-volt 500 CCA 105 min Reserve
CHARGER	NA	NA	NA
HEADLIGHTS	Headlights standard	Headlights standard	Headlights standard
FUEL DELIVERY SYSTEM	Mechanical injection	Carburetor	Mechanical injection
FUEL CAPACITY	6.5 gal (24.6 L)	6.5 gal (24.6 L)	6.5 gal (24.6 L)
STEERING MECHANISM	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion	Self-adjusting Rack and Pinion
SUSPENSION (FRONT)	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
SUSPENSION (REAR)	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
BRAKES	4-wheel, hydraulic disc	4-wheel, hydraulic disc	4-wheel, hydraulic disc
PARK BRAKE	Automotive style	Automotive style	Automotive style
BODY (FRONT & FINISH)	GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish	GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish	GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish
BODY (FRAME AND REAR)	Tubular aluminum	Tubular aluminum	Tubular aluminum
TIRES (FRONT)	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply
TIRES (REAR)	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply	All-terrain, 25 x 10.5-12, 4-ply
WHEELBASE	88.7 in (225.3 cm)	114 in (225.3 cm)	114 in (225.3 cm)
OVERALL HEIGHT	78.6 in (199.6 cm)	78.6 in (199.6 cm)	78.6 in (199.6 cm)
OVERALL LENGTH	148.6 in (377.4 cm)	157.6 in (400.3 cm)	157.6 in (400.3 cm)
BED L X W X H (CARGO BOX)	48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)
DIFFERENTIAL GROUND CLEARANCE	8.2 in (20.8 cm)	8.2 in (20.8 cm)	8.2 in (20.8 cm)
TRACK WIDTH (FRONT)	48.8 in. (124 cm)	48.8 in. (124 cm)	48.8 in. (124 cm)
TRACK WIDTH (REAR)	48.8 in. (124 cm)	48.8 in. (124 cm)	48.8 in. (124 cm)
MAX WIDTH (W/O MIRRORS)	58.5 in. (148.5 cm)	58.5 in. (148.5 cm)	58.5 in. (148.5 cm)
CURB WEIGHT (NO BATTERIES)	1710 lbs (775.64 kg)	1630 lbs (739.36 kg)	1750 lbs (793.8 kg)
TOTAL VEHICLE CAPACITY	1700 lb (771.1 kg)	1600 lb (725.8 kg)	1600 lb (725.8 kg)
BED LOAD CAPACITY	800 lb (363.2 kg)	800 lb (363.2 kg)	800 lb (363.2 kg)
TOWING CAPACITY	1700 lb (771.1 kg)	1600 lb (725.8 kg)	1600 lb (725.8 kg)
COMBINED VEHICLE CAPACITY	1700 lb (771.1 kg)	1600 lb (725.8 kg)	1600 lb (725.8 kg)
SPEED	25 mph (40.2 km/h)	25 mph (40.2 km/h)	25 mph (40.2 km/h)
TURNING RADIUS	13.8 ft (4.2 m)	17 ft (5.4 m)	17 ft (5.4 m)
WARRANTY	2-year/2,000 hour limited	2-year/2,000 hour limited	2-year/2,000 hour limited

*There are no warranties, express or implied, contained herein. See Limited Warranty found in the owner's manual or write to Club Car, LLC. Vehicle specifications are accurate for each model at the time of publication. The company reserves the right to make design changes without obligation to make these changes on units previously sold. These vehicles are designed and manufactured for off-road use only. They do not conform to Federal Motor Vehicle Safety Standards for automobiles or to FMVSS 500 for low-speed vehicles and are not equipped for operation on public streets, roads or highways.



Ingersoll Rand is a global diversified firm providing products, services and solutions to enhance the quality and comfort of air in homes and buildings, transport and protect food and perishables, secure homes and commercial properties, and increase industrial productivity and efficiency. Driven by a 100-year-old tradition of technological innovation, we enable our customers to create progress and a positive impact in their world.

1.800.CLUBCAR • +1 706.863.3000

www.clubcar.com

www.ingersollrand.com

3/14 58648767